



Data Sheet | Item Number: 243-212
4-conductor modular PCB connector; PUSH WIRE®; 0.8 mm Ø; Pin spacing 5.75 mm; 2-pole; for individual solder pins; for KNX; light gray/yellow
<https://www.wago.com/243-212>

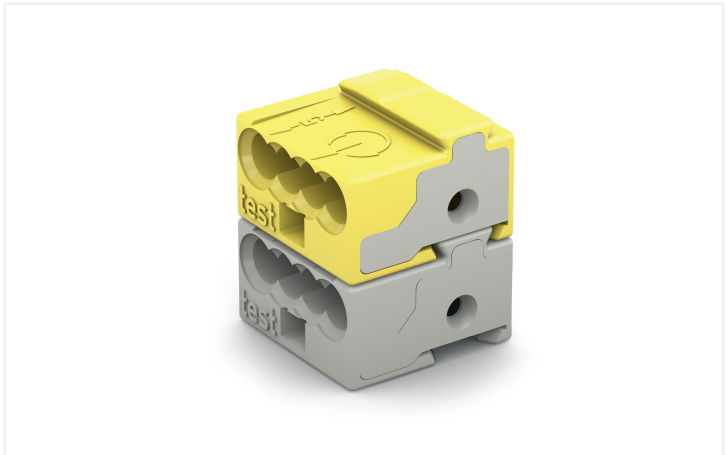

Color: ☐ light gray/yellow

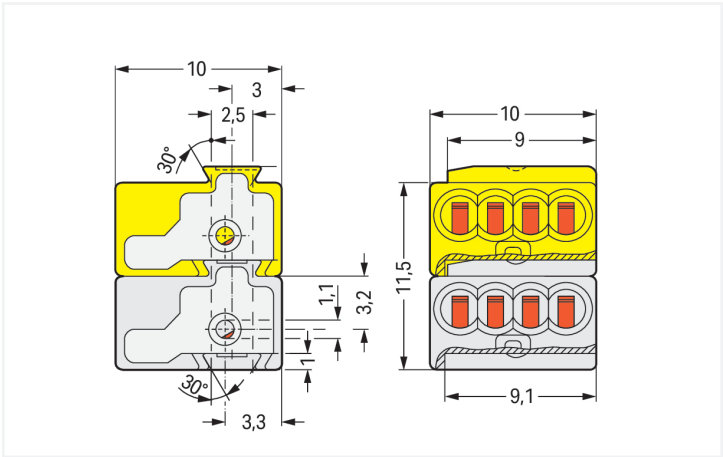

Dimensions in mm

Verbindungsklemme zum Stecken Serie 243, lichtgrau/gelb

Die Verbindungsklemme zum Stecken mit der Artikelnummer 243-212 ermöglicht eine einfache und sichere Verdrahtung. Bei dieser Verbindungsklemme zum Stecken ist für den Leiteranschluss eine Abisolierlänge im Bereich von 5 bis 6 mm nötig. Dieses Produkt verwendet die PUSH WIRE®-Technologie. Der Steckklemmanschluss PUSH WIRE® nutzt die Knicksteifigkeit der Leiter, um damit die Federkraft zu überbrücken und so den Leiter schneller zu klemmen. Die Maße sind in Breite x Höhe x Tiefe (10 x 11,5 x 10) mm. Die Oberfläche der Kontakte besteht aus Zinn.

Electrical data			
Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	250 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Rated current	6 A	6 A	6 A



Connection data

Clamping units	8	Connection 1	
Total number of potentials	2	Connection technology	PUSH WIRE®
Number of connection types	1	Solid conductor	22 ... 20 AWG
Number of levels	1	Conductor diameter	0.6 ... 0.8 mm / 22 ... 20 AWG
		Conductor diameter (note)	When using different conductor diameters
		Strip length	5 ... 6 mm / 0.2 ... 0.24 inches
		Pole number	2

Connection 2	
Solid conductor	18 AWG
Conductor diameter	1 mm / 18 AWG
Conductor diameter (note)	When using identical conductor diameters

Physical data

Width	10 mm / 0.394 inches
Height	11.5 mm / 0.453 inches
Depth	10 mm / 0.394 inches

Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor

Material data

Note (material data)	Information on material specifications can be found here
Color	light gray/yellow
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.024 MJ
Weight	1.5 g

Environmental requirements

Limit temperature range	-60 ... +105 °C
Continuous operating temperature	-60 °C



Commercial data		
PU (SPU)		500 (50) pcs
Packaging type		Box
Country of origin		DE
GTIN		4044918441407
Customs tariff number		85369010000

Product classification		
UNSPSC		39121409
eCl@ss 10.0		27-14-11-04
eCl@ss 9.0		27-14-11-04
ETIM 9.0		EC000446
ETIM 8.0		EC000446
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UR Underwriters Laboratories Inc.	UL 1059	E45172

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 243-212	↓

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	↓



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 243-212	EPLAN Data Portal 243-212
	WSCAD Universe 243-212
	ZUKEN Portal 243-212

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-332/575-103
Marking strips; as a DIN A4 sheet; MARKED; 1-12 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white

Installation Notes

Installation



The KNX bus system is the intelligent solution to simplify existing building installation control. Instead of many different conventional wiring styles, the KNX bus system offers a flexible general solution for every application in the field of switching, controlling, measuring, monitoring and signaling.

The decentralized KNX system consists of active and intelligent modules. The system can be customized using the different KNX components.

For example, pairs of sensors/actuators control:

- lighting
- window blinds
- heating/ventilation
- energy management systems
- information display/transmission

Command data is transmitted via twisted-pair bus cable, which is connected to the sensors and actuators by WAGO PUSH WIRE® connectors.

The sensors transmit the commands as "telegrams" to the actuators via the bus. Once the information is gathered, the commands are performed by the actuators. An address is assigned to each "telegram" so that only a defined transmitter is allowed to activate a specified receiver. The address assignment is done using a programming tool.

The bus system is divided into "lines" (segments). The bus lines can be laid out either in a line, star or tree topology. WAGO's PUSH WIRE® connectors connect the different branches to one another in the junction boxes.

New components can be easily added to the existing bus, permitting future expansion of the installation. When future reallocation of rooms, floors or buildings is required, the installation remains unchanged, so that only the sensors must be re-assigned to the actuators.