


**Data Sheet | Item Number: 207-1331**

Gelbox; Branch; for cables; with gel; 221, 2x73 Series; max. 4 mm<sup>2</sup> connectors; without splicing connectors; Size 1; gray

<https://www.wago.com/207-1331>

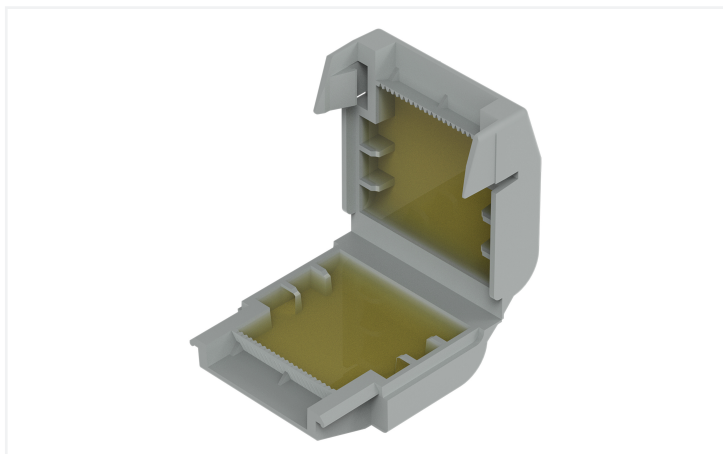

Color: ■ gray





Application Examples

- Bathroom installation (DIN VDE 0100-701)
- Washing facilities/irrigation systems
- Farms and garden centers (DIN VDE 0100-0705)
- Swimming pool areas (DIN VDE 0100-702)
- Parking lot lighting
- Charging stations and lighting systems in ports

Note on Packaging Unit (PU) and Subpackaging Unit (SPU):

If you order a full PU, you will receive our eco-friendly, sustainable cardboard blisters packed in a shelf-ready box.  
If you order a quantity smaller than a full PU, you will receive the eco-friendly, sustainable cardboard blisters without a shelf-ready box.

Please refer to the system description for the splicing connectors that can be used.

Your Benefits:

- Easy, fast and safe to use
- Can be used immediately and accessed again later
- Silicon-free
- Label-free
- Suitable for indefinite storage
- The complete system, which consists of gelboxes and WAGO splicing connectors, has been VDE-tested and IPX8-certified.

Connection data	
Connection 1	
Actuation type	Locking system

Physical data	
Width	32 mm / 1.26 inches
Height	17.8 mm / 0.701 inches
Depth	33.6 mm / 1.323 inches

Mechanical data	
Design	Size 1
Mounting type	Flying leads
Protection type	IPX8
Suitable	for 4 mm² splicing connectors

Material data	
Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Housing material	Polypropylene
Fire load	0 MJ
Weight	12 g




Environmental requirements	
Ambient temperature (operation)	-55 ... +85 °C
Ambient temperature (storage)	0 ... +40 °C

Commercial data	
PU (SPU)	48 (4) pcs
Packaging type	Box
Country of origin	IT
GTIN	4055143997799
Customs tariff number	85389099990

Product classification	
UNSPSC	39121722
ETIM 9.0	EC001170
ETIM 8.0	EC001170
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
VDE VDE Prüf- und Zertifizierungsinstitut	EN 60998	400051938
		EU-Declaration of Conformity WAGO GmbH & Co. KG
		UK-Declaration of Conformity WAGO GmbH & Co. KG

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 207-1331	





Documentation					
System Description			Additional Information		
System Description	pdf	↓	Certificate	pdf	↓
207 Series Gel boxes	1156.45 KB			2308.76 KB	
System Description	pdf	↓	DLG Test Report 7438	pdf	↓
207 Series Gel boxes	1191.37 KB			1455.46 KB	

Bid Text		
207-1331	xml	↓
	3.58 KB	
207-1331	docx	↓
	20.35 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models	ZUKEN Portal
207-1331	207-1331
↓	↓

## Installation Notes

### Installation



Open the Gelbox at the side latches.      Place the wired connector in the Gelbox.      Place the wired connector in the Gelbox.      Close the Gelbox.



Close latch securely.

Re-accessible:

- Open the Gelbox.
- Remove the gel.
- Rewire with new components.



Lift the flap and pull the cover perforation forward.      Press in the perforation on the sides.      Tear off the cover from the perforation.      As a counter display: Bend the rear flap at the fold, straighten it and fix it in the cardboard cut-out



If the flap is not required, tear off from the perforation.